


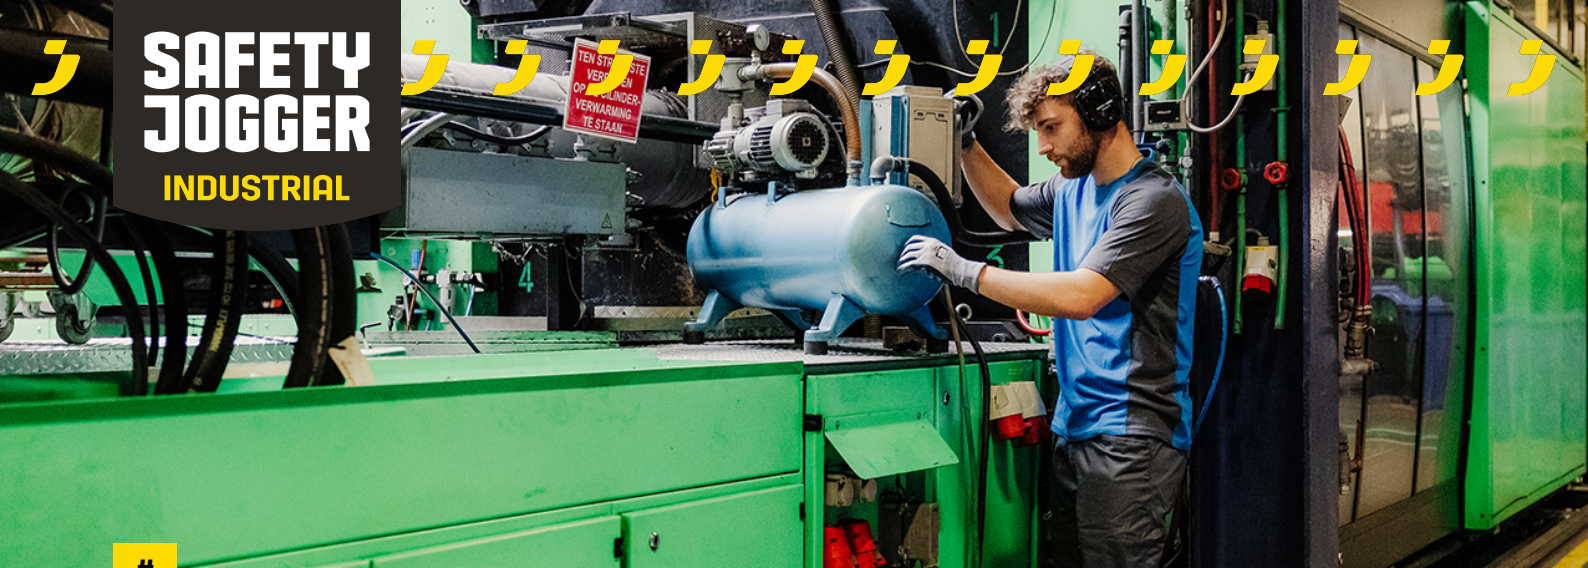

#

ABSOLUTE S1 P

ESD

#####. ### #####. ### ## ##
###, ## ## # ### ##### # ### ##### ## ### #####.

## ##	##
## ##	3D ##
###	SJ # ##
##	###
###	###/##
Top	## ##
####	S1 P / ESD, SRC, CI
## ##	EU 35-47 / UK 3.0-12.0 / US 3.0-13.0 JPN 21.5-31 / KOR 230-310
## ##	0.495 kg
###	ASTM F2413:2018 EN ISO 20345:2011



BLK



NAV




3D ##

#####.




#####

##, ##### ## ## ##
#####.



#####

##.
100% ## ## ## ##
#####.



###

#####. ## ## ##### ## ##
#####. ## #####.



###

ESD# ## ## ## ## ## ## ##

#####. ## ## ## 100#####
100### #####.

##:

##

##:

##, ## #####

##:

#####. ### ##### ## ##### ### #####.

	##	## ##	##	EN ISO 20345
## ##	##			
	##: ### ##	mg/cm²/h	37	≥ 0.8
	##: ### ##	mg/cm²	250	≥ 15
## ##	3D ##			
	##: ### ##	mg/cm²/h	80	≥ 2
	##: ### ##	mg/cm²	550	≥ 20
###	SJ # ##			
	###: #####(##/##)(###)	##	25600/12800	25600/12800
###	###/##			
	### #####(## ##)	mm³	85	≤ 150
	### ## ## SRA: ###	##	0.43	≥ 0.28
	## SRA# ### ##: ##	##	0.41	≥ 0.32
	### ## ## SRB: ###	##	0.17	≥ 0.13
	## SRB# ### ##: ##	##	0.19	≥ 0.18
	### ## #	###	N/A	0.1 - 1000
	ESD #	###	45	0.1 - 100
	#### ## ##	J	20	≥ 20
Top	## ##			
	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	16	≥ 14
	#### ## # (## # ## ## 15kN)	mm	16.5	≥ 14

##:

##, ## ## ##### ## # #####. ## ##### ### Safety Jogger # ##### ###, ### ## ## ##### ## ##### ##### ## # #####.