



Heavy


ALTAR S3 MID S3S

ALTARS3MID

##

Safety Jogger ALTAR S3 ## ## ## ## ## ## ## ## ## ##. SR
##, ### ## ##, ## ## ##, ### ## ## ##, ## ## ##, ## ## ##, ## ##
##.


## ##	#### ## ##
## ##	##
###	SJ # ##
##	## ## ##
###	PU/##
Top	##
####	S3S / SR, SC, LG, ESD, ##, CI, FO, HRO
## ##	EU 36-48 / UK 3.5-13.0 / US 4.0-13.5 JPN 22.5-31.5 / KOR 235-315
## ##	0.804 kg
###	ASTM F2413:2018 EN ISO 20345:2022

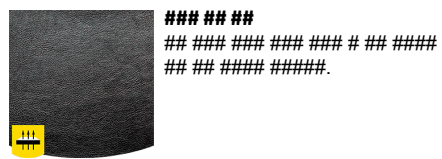

##.



##.




##.



300°C# ## ## ## ## ##.



##.



##.



CAM



SND

##:
##, ##, ##, ####

##:
#, ### ##, ## ##### #, ### #, ### # # #, ## #, ##

```
## ## ##:
### ## ##### ## ## ## ## ## ## ## ## ##. ## ##### ## ## ## ## ##.
```

##	## ##	##	EN ISO 20345
## ##	#### ## ##		
	##: ### ##	mg/cm²/h	7.8 ≥ 0.8
	##: ### ##	mg/cm²	68 ≥ 15
## ##	##		
	##: ### ##	mg/cm²/h	54.48 ≥ 2
	##: ### ##	mg/cm²	436 ≥ 20
###	SJ # ##		
	###: ####(##/##)(###)	##	25600/12800 25600/12800
###	PU/##		
	### ####(## ##)	mm³	91 ≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.41 ≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.37 ≥ 0.36
	SR ## ## - ## + #### - #### ## ##	##	0.28 ≥ 0.19
	SR ## ## - ## + #### - ## ## ##	##	0.25 ≥ 0.22
	### ## #	###	11.2 0.1 - 1000
	ESD #	###	65 0.1 - 100
	#### ## ##	J	33 ≥ 20
Top	##		
	#### ## # (## # ##### 100J)	mm	N/A N/A
	#### ## # (## # ## ## 10kN)	mm	N/A N/A
	#### ## # (## # ## ## 200J)	mm	17.0 ≥ 14
	#### ## # (## # ## ## 15kN)	mm	21.5 ≥ 14

```
#####
#### #:
#####
##### ## ##### # ####. ## ##### Safety Jogger # #####, ### ## ## ##### ##### ## # #####
```