



Medium

BESTRUN METALFREE S3 S3S

BESTRUNMF






##

Safety Jogger ##### ##### ##, ##, #####. ## ## ##
#, ### ## ##, ## ## ##### ## # ##### ## ## #####.

## ##	## ##### ##
## ##	##
###	SJ # ##
##	## ## ##
###	### PU/### PU
Top	##
####	S3S / SR, SC, LG, ESD, CI, FO
## ##	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
## ##	0.655 kg
###	ASTM F2413:2018 EN ISO 20345:2022+A1:2024



3FIT
SYSTEM

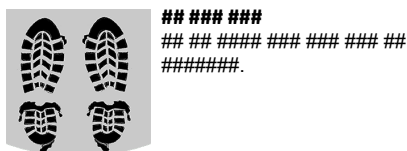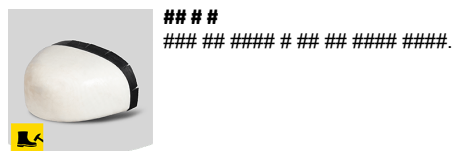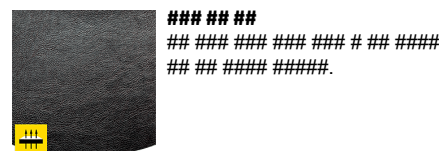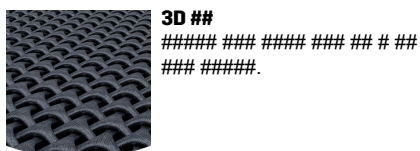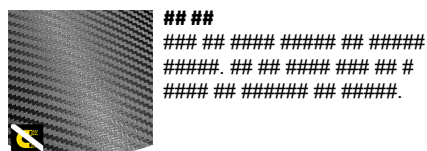

BLK

##:
####, ##, ##, ##

##:
##, ## ##### ##, ##

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20345
## ##	## ##### ##			
	##: ### ##	mg/cm²/h	2.2	≥ 0.8
	##: ### ##	mg/cm²	25	≥ 15
## ##	##			
	##: ### ##	mg/cm²/h	49.8	≥ 2
	##: ### ##	mg/cm²	398.8	≥ 20
###	SJ # ##			
	###: ####(##/##)(###)	##	25600/12800	25600/12800
###	### PU/### PU			
	### #####(## ##)	mm³	56.4	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.41	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.39	≥ 0.36
	SR ## ## - ## + ##### - ##### ## ##	##	0.28	≥ 0.19
	SR ## ## - ## + ##### - ## ## ##	##	0.27	≥ 0.22
	### ## #	###	32.6	0.1 - 1000
	ESD #	###	29	0.1 - 100
	#### ## ##	J	26	≥ 20
Top	##			
	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	17.0	≥ 14
	#### ## # (## # ## ## 15kN)	mm	22.5	≥ 14

##.

##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ##### ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com