


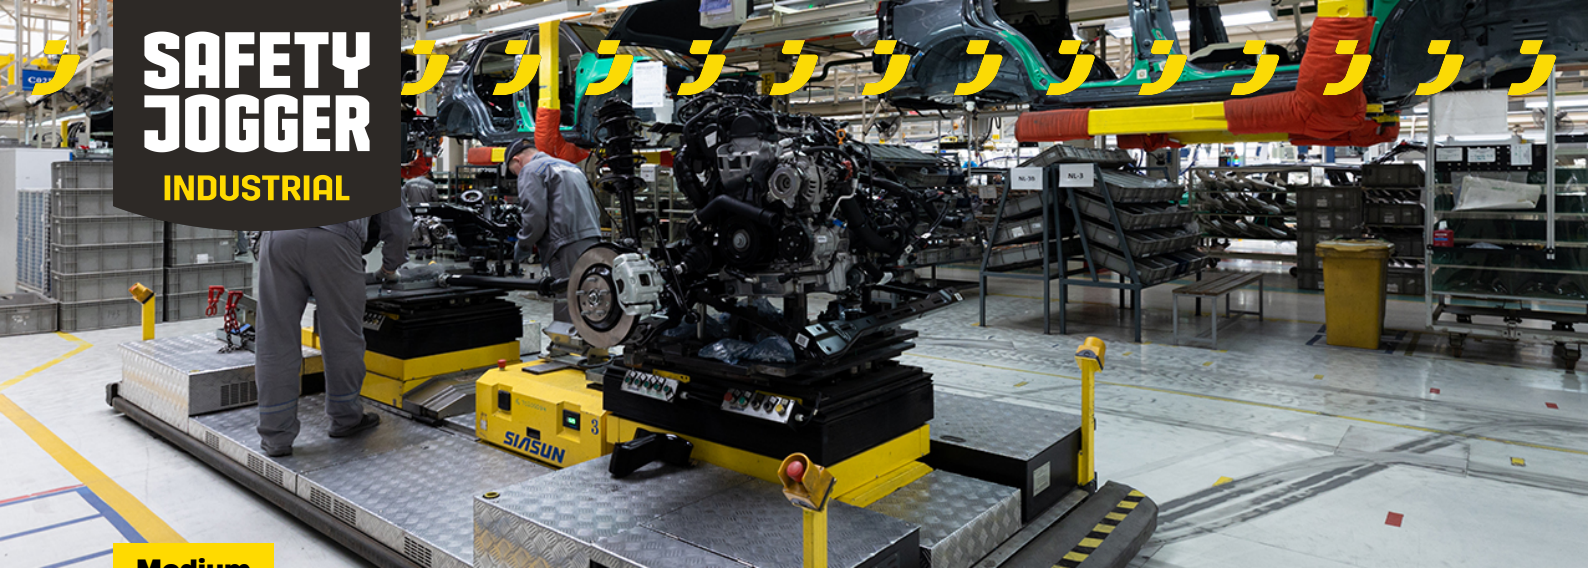

Medium


BESTGIRL S3 LOW

BSTGRLS3LO

2## ####. # ## ## ## ## ## ##

##, ## ##, ESD ## # ## ## ## ## ## ## # S3 ## ####
#####. ### #### ## ## BESTGIRL #### ## ## ## ## ##
####.

## ##	#### ##
## ##	##
###	SJ # ##
##	##
###	PU / PU
Top	##
####	S3 / SR, LG, ESD, CI, FO
## ##	EU 35-43
## ##	0.498 kg
###	EN ISO 20345:2022+A1:2024 ASTM F2413:2024

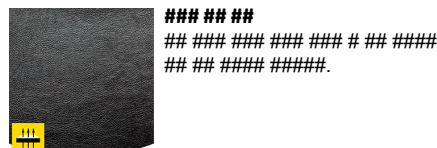

##.



##(LG)

##.



S3
S3 #### ## ## ## ## ## ## ##
##. # ##

####.



##.



##.



SJ FOAM

#, ## # ## ## ##
##. ## # ## ##.

**SAFETY
JOGGER**
WORKS

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com

##:
####, ###, ##, ##, ##, ##

##:
##, ### ## ##, ##

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20345
## ##	#### ##			
	##: ### ##	mg/cm²/h	2.3	≥ 0.8
	##: ### ##	mg/cm²	29.4	≥ 15
## ##	##			
	##: ### ##	mg/cm²/h	86.31	≥ 2
	##: ### ##	mg/cm²	691	≥ 20
###	SJ # ##			
	###: ####(##/##)(###)	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
###	PU / PU			
	### ####(## ##)	mm³	29.9	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.42	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.46	≥ 0.36
	SR ## ## - ## + #### - ##### ## ##	##	0.21	≥ 0.19
	SR ## ## - ## + #### - ## ## ##	##	0.24	≥ 0.22
	### ## #	###	13.2	0.1 - 1000
	ESD #	###	13	0.1 - 100
	#### ## ##	J	31	≥ 20
Top	##			
	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	15.0	≥ 14
	#### ## # (## # ## ## 15kN)	mm	20.0	≥ 14

##:
##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP



www.safetyjogger.com