




SAFETY JOGGER

INDUSTRIAL

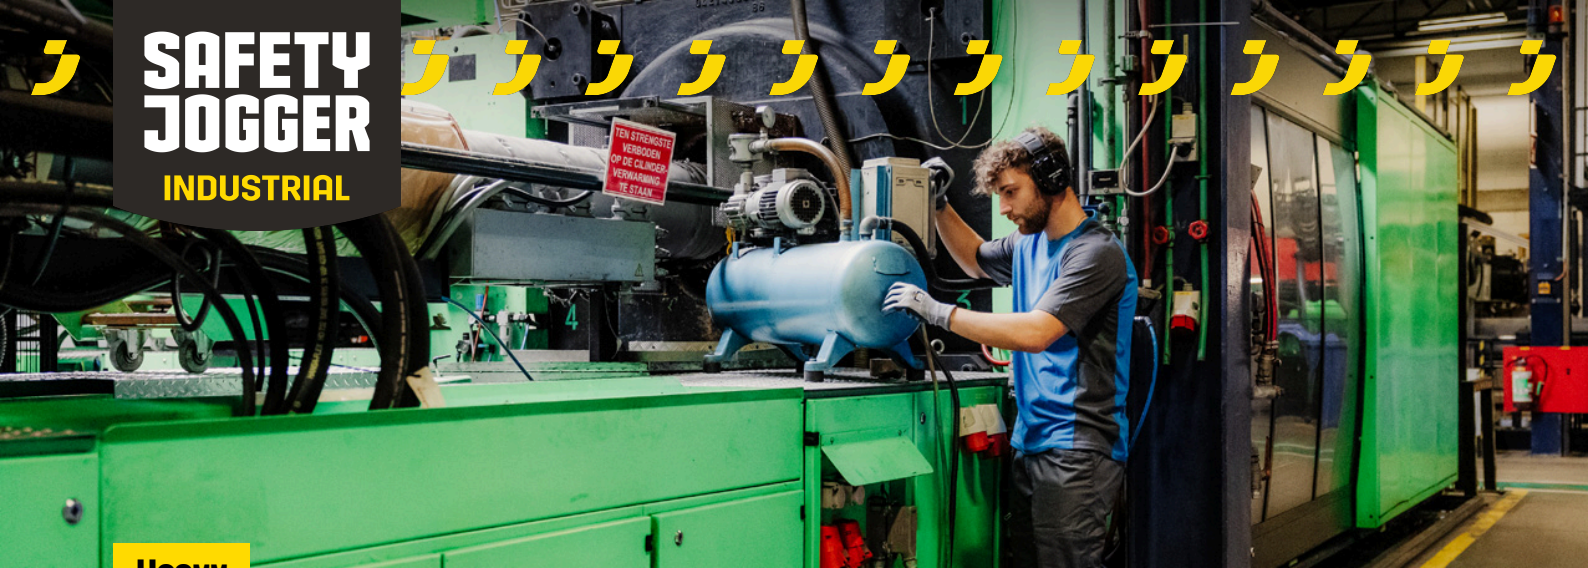

Heavy

CONSTRUBOY EW S3 LOW

COBOYEWS3L

#####

Featuring an extra-wide steel toe cap, the CONSTRUBOY EW range ensures maximum comfort for workers with wider feet. The full-grain leather upper and double-density BASF PU outsole provide durability and excellent grip for demanding work environments.

###	#### #, ## #
###	##
###	SJ #
##	##
###	### PU/### PU
Top	##
####	S3 / SR, SC, LG, CI, FO
###	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5
	JPN 21.5-31.5 / KOR 230-315
##	0.670 kg
###	ASTM F2413:2018
	EN ISO 20345:2022+A1:2024



BLK



#####



###{CI}
##(CI) #####. ##
#####



###{LG}

#####




#####



###{SC}

#####



#####

SAFETY JOGGER
WORKS

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

**ENGINEERED
IN EUROPE**

www.safetyjogger.com

##:
##, ##, ## # ##, ##, ##, ###

##:
##, ### ##, ### ## ##, ## ##, ###

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20345
## ##	#### ##, ## ##			
	##: ### ##	mg/cm²/h	1.2	≥ 0.8
	##: ### ##	mg/cm²	16	≥ 15
## ##	##			
	##: ### ##	mg/cm²/h	86.31	≥ 2
	##: ### ##	mg/cm²	691	≥ 20
###	SJ # ##			
	###: ####(##/##)(###)	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
###	### PU/### PU			
	### #####(## ##)	mm³	50	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.41	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.39	≥ 0.36
	SR ## ## - ## + ##### - ##### ## ##	##	0.32	≥ 0.19
	SR ## ## - ## + ##### - ## ## ##	##	0.35	≥ 0.22
	### ## #	###	35.3	0.1 - 1000
	ESD #	###	N/A	0.1 - 100
	#### ## ##	J	36	≥ 20
	##			
Top	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	19.5	≥ 14
	#### ## # (## # ## ## 15kN)	mm	23.5	≥ 14

##:
##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com