



#

ECODEMPO S3S LOW

ECODEMPS3L


ESD ##, ### ##

Safety Jogger ##### S3S# ## ## ESD ## #####. ## ## ## #,
##, ### ## #####. ### ## ## ## ## #####.


## ##	TPU, ### ##
## ##	### ##
###	SJ ### # ###
##	## ## ##
###	###/##
Top	##
####	S3S / SR, ESD, ESD, ##, CI, FO, HRO
## ##	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
## ##	0.530 kg
###	EN ISO 20345:2022+A1:2024 ASTM F2413:2024



BLK

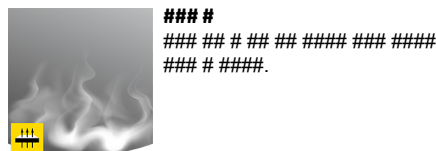

#####.

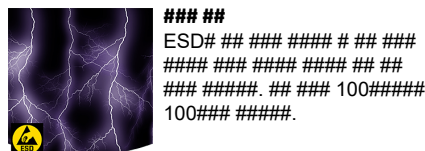


ESD# ## ## ## ## ## ## ## ##


#####. ## ## ## 100#####
100### #####.



##.

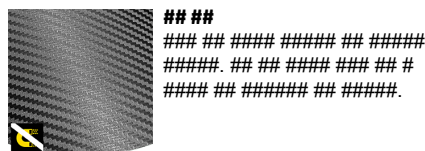

#####. ## ## ## ## ## ## ## ##
##.

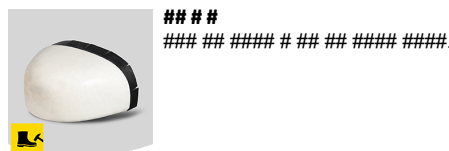

##.



##.

**SAFETY
JOGGER**
WORKS

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com

##:
####, ###, ##, ##

##:
##, ## #####

##:
#####. ### ##### ### ##### ## ##.

##		## ##	##	EN ISO 20345
## ##	TPU, ### ##			
	##: ### ##	mg/cm²/h	210.9	≥ 0.8
	##: ### ##	mg/cm²	169	≥ 15
## ##	### ##			
	##: ### ##	mg/cm²/h	50.38	≥ 2
	##: ### ##	mg/cm²	403	≥ 20
###	SJ ### # ###			
	###: #####(##/##)(###)	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
###	###/##			
	### #####(## #)	mm³	119.4	≤ 150
	## ### ## - ### + NaLS - ## ### #####	##	0.48	≥ 0.31
	## ### ## - ### + NaLS - ## ## ###	##	0.48	≥ 0.36
	SR ### ## - ### + ##### - ##### ## #	##	0.36	≥ 0.19
	SR ### ## - ### + ##### - ## ## ###	##	0.36	≥ 0.22
	### ## #	###	650	0.1 - 1000
	ESD #	###	22	0.1 - 100
	##### ## #	J	25	≥ 20
Top	##			
	##### ## #(## # ##### 100J)	mm	N/A	N/A
	##### ## #(## # ## ## 10kN)	mm	N/A	N/A
	##### ## #(## # ## ## 200J)	mm	17.5	≥ 14
	##### ## #(## # ## ## 15kN)	mm	24.0	≥ 14