


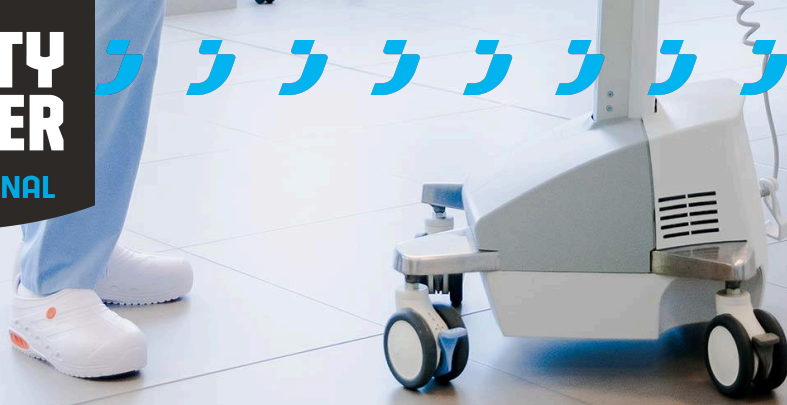

Heavy

OXYSAFE PB

###

#####. ## ESD ## ##, ##
##, ## ## ## # ## ## ## ## ## ##.

## ##	### EVA
## ##	N/A
###	SJ # ##
##	N/A
###	### EVA
Top	##
#####	PB / SR, ESD, A, E
## ##	EU 35/36-45/46 / UK 3.0/3.5-10.5/11.0 / US 5.5/6.0-11.5/12.0 JPN 21.5/22.5-29/30 / KOR 230/235-295/300
## ##	0.281 kg
###	ASTM F2413:2018 EN ISO 20346:2022



NAV



BLK



WHT



```
### # #
#### ## ##### # ## ## ##### #####.
```



```
##### ## ###
# ### ##, ## ### ### ## ###
### ### #####. ### ### ###
#### #### # ## #### #####
#### ##### ## #####.
```



```
### ##
ESD# ## ### ##### # ## ###
##### ### ##### ##### ## ##
### #####. ## ### 100#####
100### #####.
```



30°C## ## ##
30°C# ##### ## # #####.



#####.

##:
####, ##, ##, ##

##:
##, ##

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20346
## ##	### EVA			
	##: ### ##	mg/cm²/h	N/A	≥ 0.8
	##: ### ##	mg/cm²	N/A	≥ 15
## ##	N/A			
	##: ### ##	mg/cm²/h	N/A	≥ 2
	##: ### ##	mg/cm²	N/A	≥ 20
###	SJ # ##			
	###: #####(##/##)(###)	##	25600/12800	25600/12800
###	### EVA			
	### #####(## ##)	mm³	232.4(Density: 0.29)	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.39	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.38	≥ 0.36
	SR ## ## - ## + ##### - ##### ##	##	0.22	≥ 0.19
	SR ## ## - ## + ##### - ## ##	##	0.23	≥ 0.22
	### ## #	###	N/A	0.1 - 1000
	ESD #	###	43	0.1 - 100
	#### ## ##	J	34.0	≥ 20
Top	##			
	#### ## # (## # ##### 100J)	mm	16.5	≥ 13
	#### ## # (## # ## 10kN)	mm	20.5	≥ 13
	#### ## # (## # ## 200J)	mm	N/A	N/A
	#### ## # (## # ## 15kN)	mm	N/A	N/A

##:
##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com