



Medium

SAFETYSTAR S3


S3

#####. ### #####
##, ##, ## ##, ##, ## # ## # ## ##### ## # #####.


## ##	## ##### ##
## ##	##
###	SJ Eco
##	##
###	PU
Top	##
####	S3 / SR, SC, CI, FO
## ##	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
## ##	0.610 kg
###	ASTM F2413:2018 EN ISO 20345:2022+A1:2024



BLK

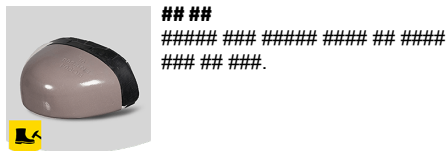


#####

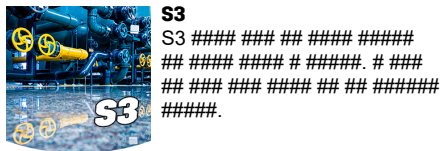

S3
S3 #####

#####

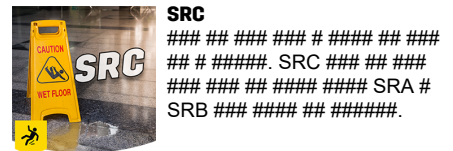


SRC


SRC #####
SRA #
SRB #####



#####

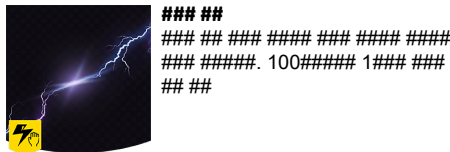

100##### 1#####
###

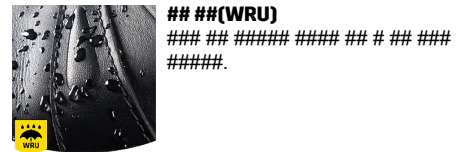

###(WRU)

#####

SAFETY
JOGGER
WORKS

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com

##:
##, ##, ##

##:
##, ### ## ##, ##

##:
#####. ### ##### ## ##### ### ##.

	##	## ##	##	EN ISO 20345
## ##	## ##### ##			
	##: ### ##	mg/cm²/h	2.8	≥ 0.8
	##: ### ##	mg/cm²	31	≥ 15
## ##	##			
	##: ### ##	mg/cm²/h	64.8	≥ 2
	##: ### ##	mg/cm²	518	≥ 20
###	SJ Eco			
	###: ####(##/##)(###)	##	25600/12800	25600/12800
###	PU			
	### #####(## ##)	mm³	92	≤ 150
	## ## ## - ## + NaLS - ## ## ##	##	0.38	≥ 0.31
	## ## ## - ## + NaLS - ## ## ##	##	0.36	≥ 0.36
	SR ## ## - ## + ##### - ##### ## ##	##	0.36	≥ 0.19
	SR ## ## - ## + ##### - ## ## ##	##	0.34	≥ 0.22
	### ## #	###	72.2	0.1 - 1000
	ESD #	###	N/A	0.1 - 100
	#### ## ##	J	30	≥ 20
Top	##			
	#### ## # (## # ##### 100J)	mm	N/A	N/A
	#### ## # (## # ## ## 10kN)	mm	N/A	N/A
	#### ## # (## # ## ## 200J)	mm	15.0	≥ 14
	#### ## # (## # ## ## 15kN)	mm	19.0	≥ 14

##:
###, ## ## ##### ## # #####. ## ##### ### Safety Jogger # ##### ###, ### ## ## ## ## ##### ##### ## # #####.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com